


A-102 118-130
ZANUSSI CORP OF AMERICA

A-22 41 12/15/79

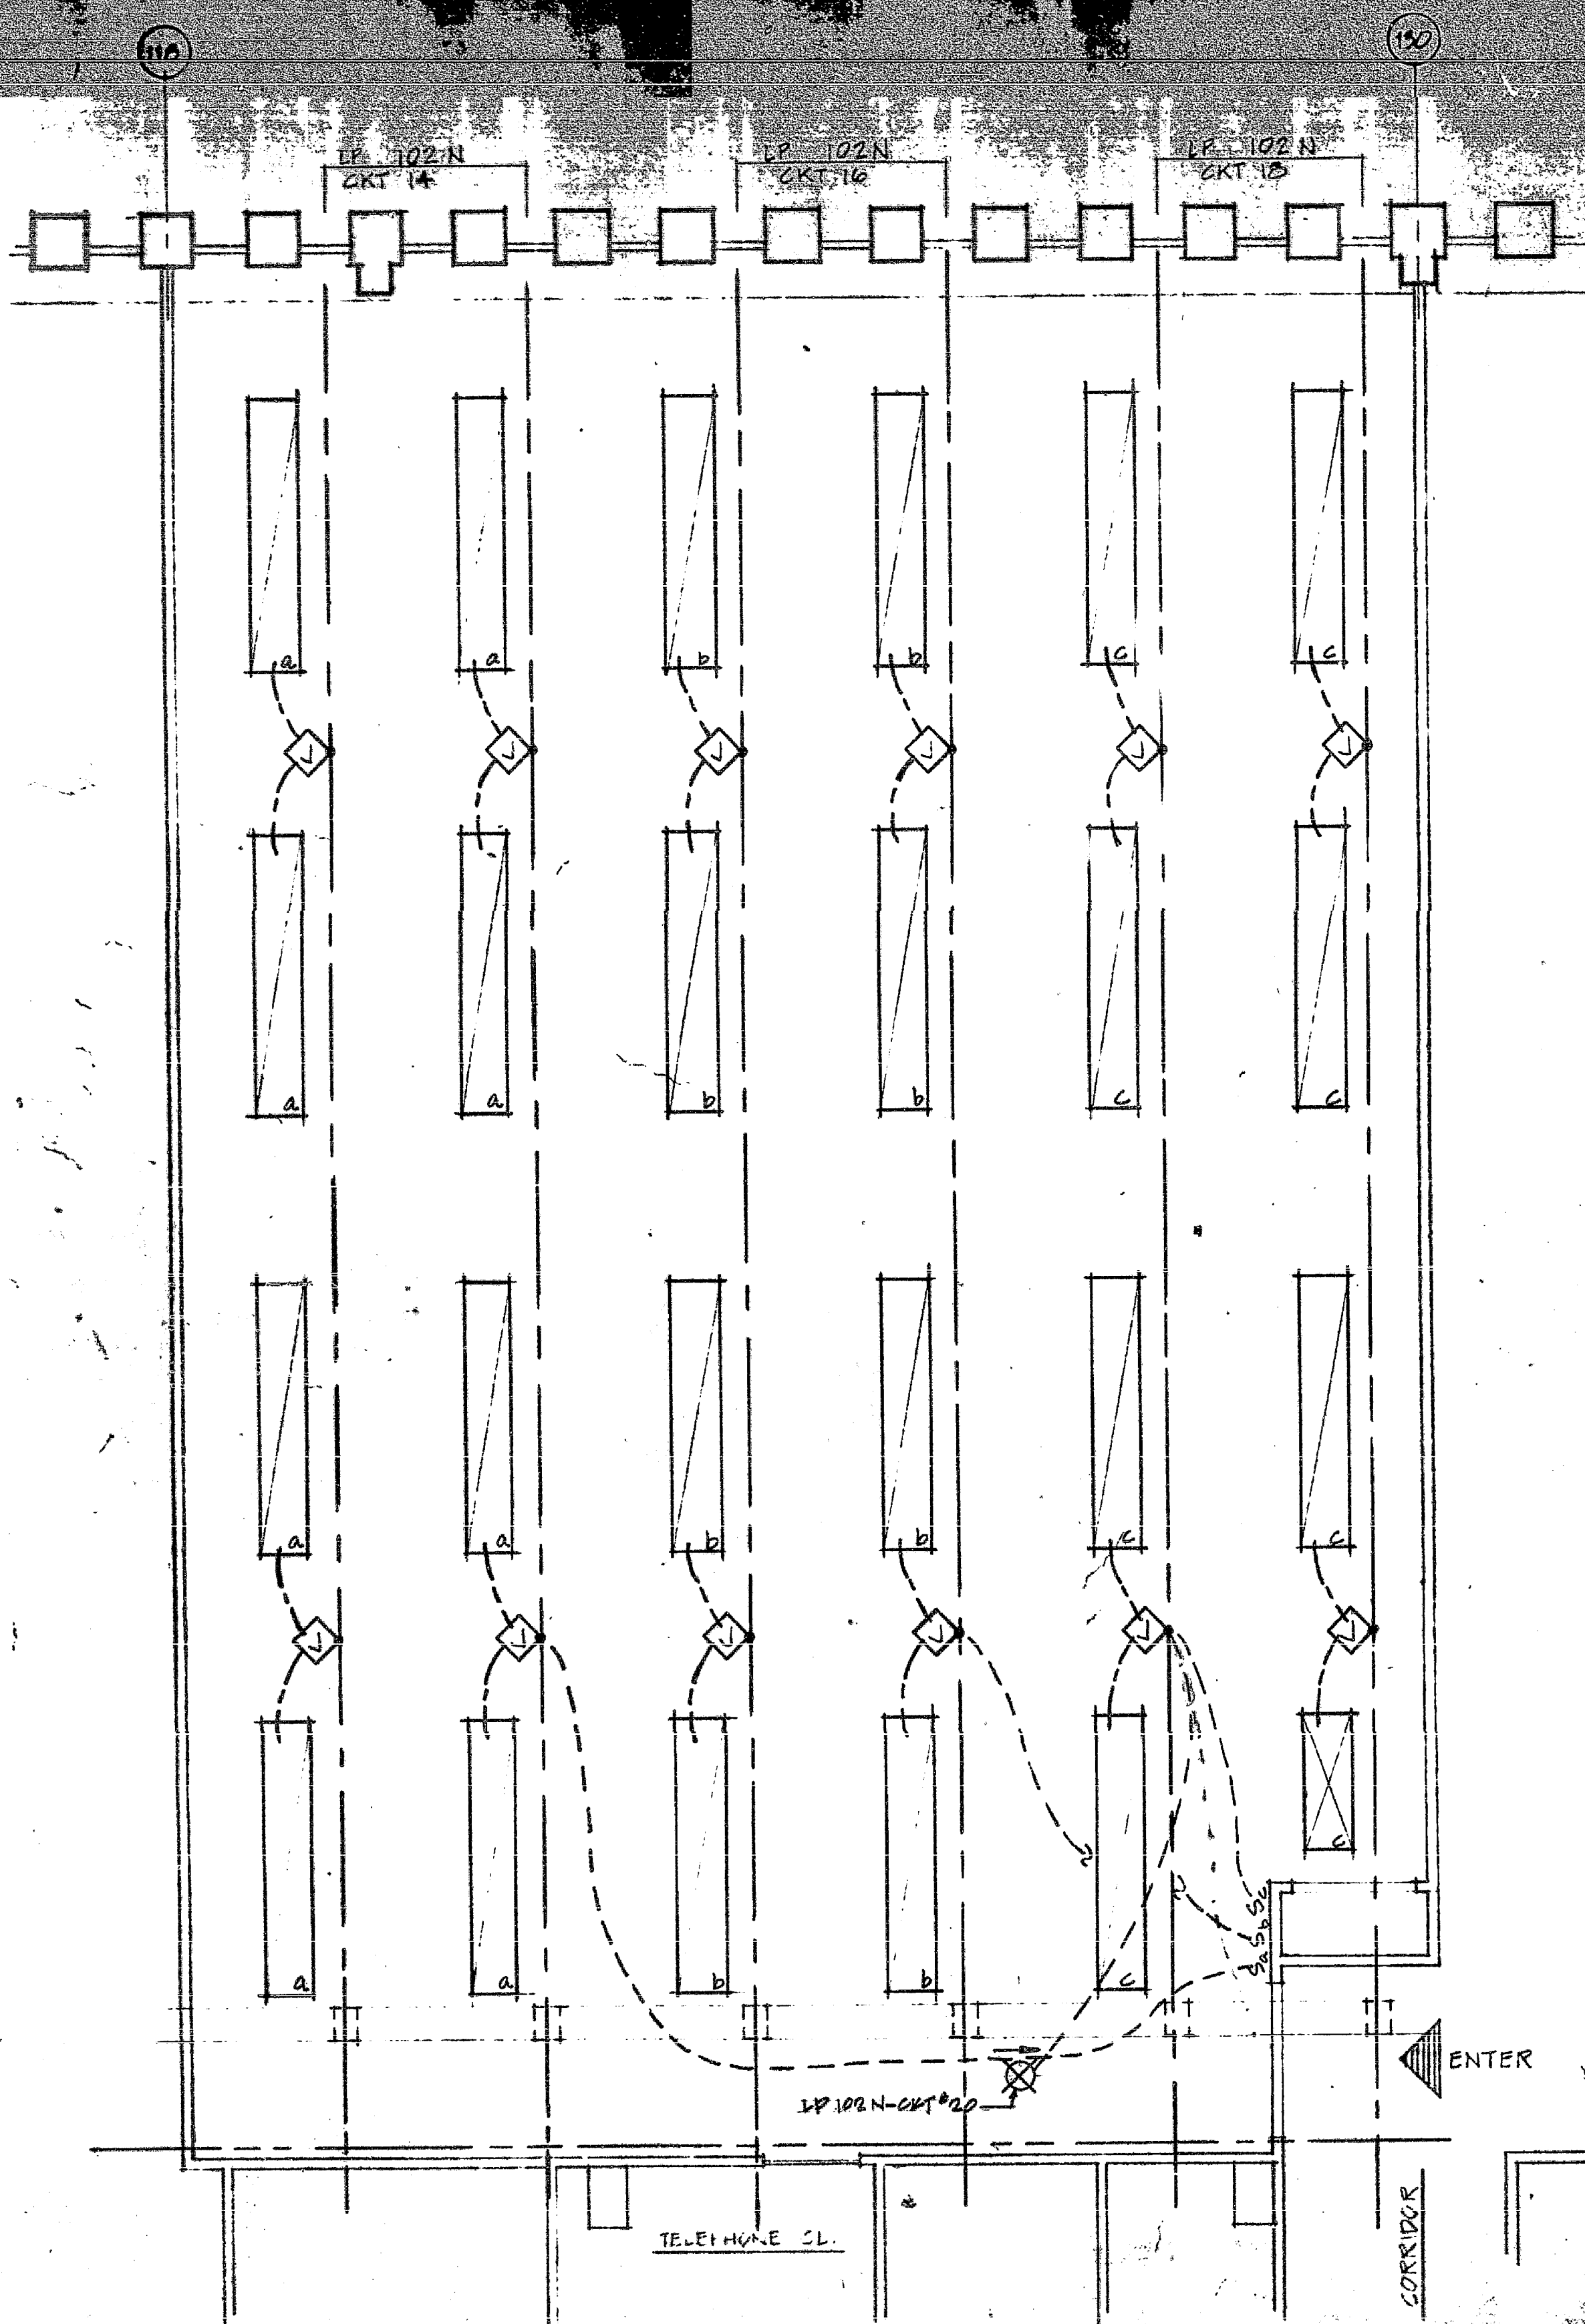


ELECTRICAL NOTES:

1. All conduits to have a minimum of 2 #12 EHN wires (w/L Standard #82), and shall be minimum of 3/4" unless otherwise noted.
 2. All electrical floor outlet units (housing) shall be set flush on the concrete or vinyl floor.
 3. The contractor shall install in all after set fittings, two (2) "Palusal Packets" (fire stop), one of each side of the afterset baffled.
 4. All device plates for wall outlets shall be brush #316 finish, anodized aluminum. Device plate for telephone outlets shall contain a bushed hole.
 5. Power interruptions and core drilling will be permitted, only between the hours of 8:00 PM and 8:00 AM.
 6. Contractor will not be permitted to chase the floor.
 7. When installing receptacle outlets, splices and/or reconnection in the underfloor system shall be made in the header duct only. Contractor shall install two from each receptacle to the header duct. All unused wiring between the removed outlets and header duct is to be removed by the contractor.
 8. Circuits that are designated with numbers 1-6 inclusive and 31 and above are not existing on the header duct. Contractor is to install and connect the appropriate quantity of wires, from item to be services, back to the designated panel in the floor cell and header duct.
 9. When installing any special purpose outlets, that are shown connected to circuits other than circuit 7-30 inclusive, the wires shall be installed by the contractor between the outlet and the indicated panel. The contractor shall modify the panel directory to reflect the circuit availability.
 10. Minimum distance for all combination telephone/duplex receptacles an/or receptacles shall be 6" from walls or connectors, unless otherwise indicated on drawings.
11. FOR MATERIALS (ELECTRICAL) FURNISHED BY THE PORT AUTHORITY
SEE DRAWING P-1-2

LEGEND	
	NEW 20' x 10' FLUORESCENT LIGHT FIXTURE
	UNDERCELL MOUNTED BOX ASSEMBLY
	NEW EXIT LIGHT
	NEW 4' x 4' FLUORESCENT LIGHT FIXTURE
	FLEXIBLE CONDUIT AND CABLE CONNECTION - (SEE STANDARD #314)
	NEW 20' x 10' FLUORESCENT LIGHT FIXTURE

RELEASED FOR BIDDING	
BY <i>[Signature]</i>	DATE 1/15/80
RELEASED FOR CONSTRUCTION	
BY <i>[Signature]</i>	DATE 2/28/80
MANAGER, WTC PLANNING DIVISION	

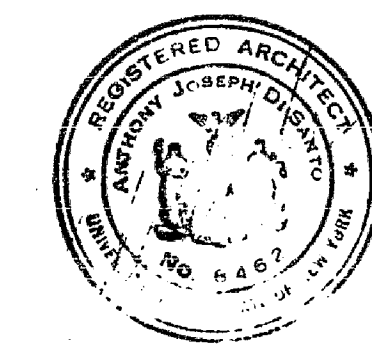

no.	date	GENERAL REV. AS PER "PORT AUTHORITY" ENG. COMMENTS DATED 12-5-79.
1	12-18-79	

REVISIONS	
ZANUSSI CORP OF AMERICA	
(ONE WORLD TRADE CENTER)	
LIGHTING PLAN	
DI SANTO ASSOCIATES	
ARCHITECTS - INTERIOR DESIGN	
FACILITIES AND OFFICE PLANNING	
180 CENTRAL PARK SO NYC 10019 581-5072	
Scale	date 10/16/79
Sheet No.	floor 102
A-22	

